




ANCHORS & FASTENERS

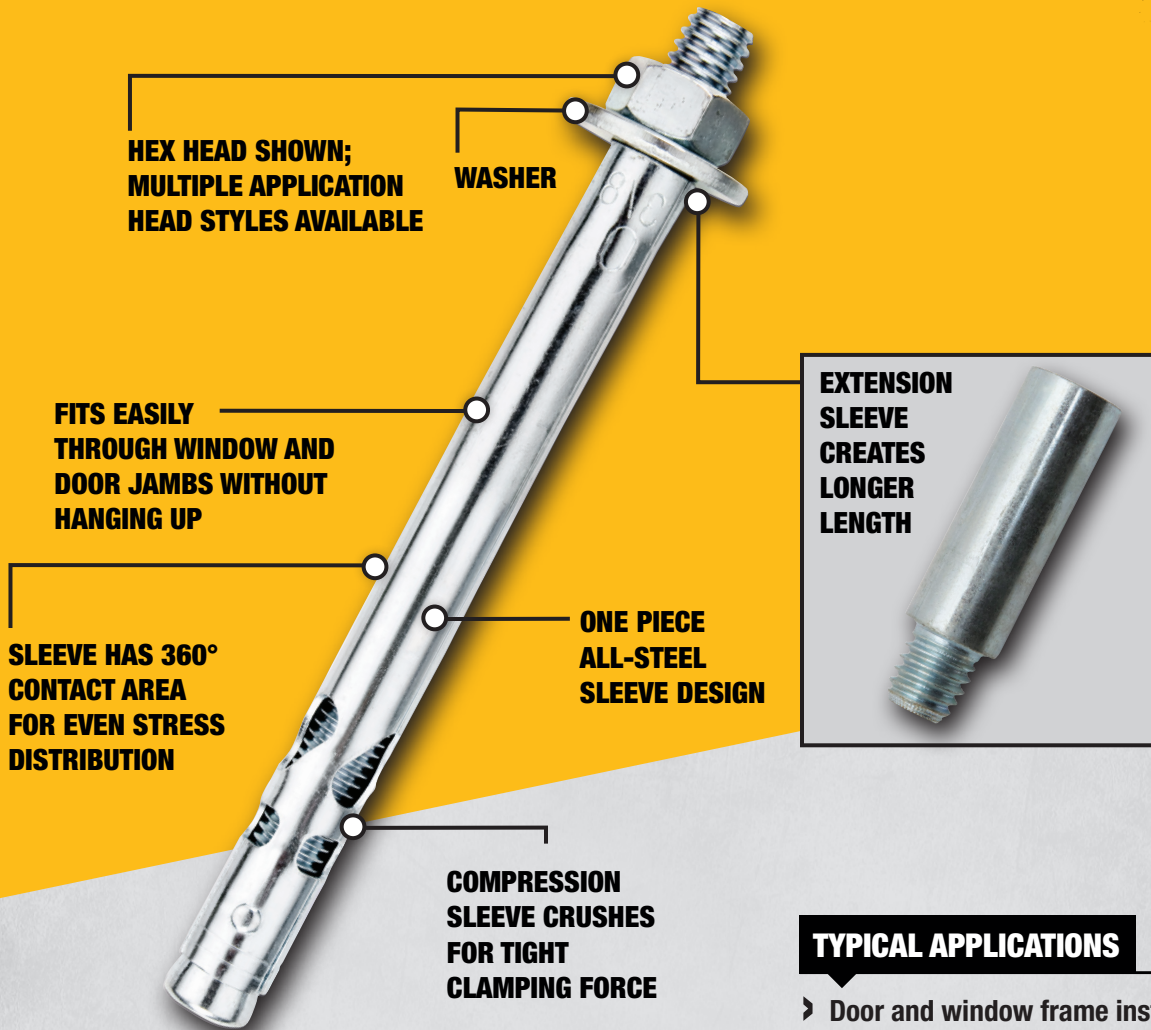


TYPICAL APPLICATIONS

- › Door and window frame installations
- › Masonry applications
- › Electrical / Mechanical applications
- › Mounting fixtures on walls
- › General purpose anchoring

HEAD STYLES



BASE MATERIALS

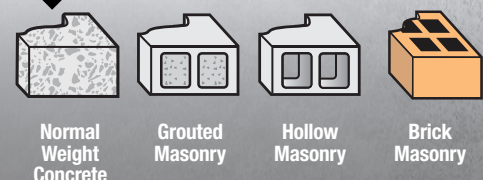

SLEEVE ANCHOR

Lok-Bolt® AS

HEX NUT LOK-BOLT AS*		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
05005S	5/16" x 1-1/2"	5/16"	100	1000
05010S	5/16" x 2-3/8"	5/16"	100	500
05015S	3/8" x 1-7/8"	3/8"	50	500
05020S	3/8" x 3"	3/8"	50	500
05022S	3/8" x 4"	3/8"	50	250
05025S	1/2" x 2-1/2"	1/2"	25	250
05030S	1/2" x 3"	1/2"	25	250
05034S	1/2" x 3-3/4"	1/2"	25	125
05033S	1/2" x 5-1/4"	1/2"	25	125
05032S	1/2" x 6"	1/2"	10	100
05035S	5/8" x 2-1/2"	5/8"	25	125
05038S	5/8" x 3"	5/8"	25	125
05040S	5/8" x 4-1/4"	5/8"	10	100
05045S	5/8" x 5-3/4"	5/8"	10	100
05050S	3/4" x 2-3/4"	3/4"	10	100
05055S	3/4" x 4-1/4"	3/4"	10	40
05060S	3/4" x 6-1/4"	3/4"	10	30
05065S	3/4" x 8-1/4"	3/4"	10	30

HEX NUT LOK-BOLT AS*		304 STAINLESS STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
06152S	3/8" x 1-7/8"	3/8"	50	500
06153S	3/8" x 3"	3/8"	50	500
06156S	1/2" x 2-1/2"	1/2"	25	250
06157S	1/2" x 3"	1/2"	25	250
06160S	1/2" x 3-3/4"	1/2"	25	125
06164S	5/8" x 4-1/4"	5/8"	10	100

ACORN NUT LOK-BOLT AS*		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
05125S	1/4" x 5/8"	1/4"	100	1000
05150S	1/4" x 1-3/8"	1/4"	100	1000
05175S	1/4" x 2-1/4"	1/4"	100	1000

ACORN NUT LOK-BOLT AS*		304 STAINLESS STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
06150S	1/4" x 1-3/8"	1/4"	100	1000

*Hex Nut and Acorn Nut Lok-Bolt published length measured from below the anchor to the end of the anchor.

COMBO FLAT HEAD LOK-BOLT AS		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
5305S	1/4" x 1-1/2"	1/4"	100	1000
5310S	1/4" x 2-1/4"	1/4"	100	1000
5315S	1/4" x 3"	1/4"	100	1000
5320S	1/4" x 4"	1/4"	100	500
5325S	1/4" x 5-1/4"	1/4"	100	500
5330S	5/16" x 2-1/2"	5/16"	100	1000
5340S	3/8" x 2-3/4"	3/8"	50	500
5345S	3/8" x 4"	3/8"	50	250
5350S	3/8" x 5"	3/8"	50	250
5360S	3/8" x 6"	3/8"	50	250

COMBO FLAT HEAD LOK-BOLT AS		304 STAINLESS STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
6170S	1/4" x 2-14"	1/4"	100	1000
6172S	1/4" x 3"	1/4"	100	1000
6174S	3/8" x 4"	3/8"	50	250
6175S	3/8" x 5"	3/8"	50	250
6176S	3/8" x 6"	3/8"	50	250

ROUND HEAD LOK-BOLT AS		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
5205S	1/4" x 1-3/8"	1/4"	100	1000
5210S	1/4" x 2-1/4"	1/4"	100	1000
5215S	1/4" x 3"	1/4"	100	1000
5220S	1/4" x 3-3/4"	1/4"	100	1000
5225S	5/16" x 2-3/8"	5/16"	100	1000
5230S	5/16" x 3-3/8"	5/16"	100	500
5235S	3/8" x 2-3/4"	3/8"	50	500
5240S	3/8" x 3-3/4"	3/8"	50	250

ROUND HEAD LOK-BOLT AS		304 STAINLESS STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
6180S	1/4" x 2-1/4"	1/4"	100	1000

THRESHOLD FLAT HEAD LOK-BOLT AS				
CAT #	SIZE	DRILL DIA	CTN	MSTR
5500S	1/4" x 2"	1/4"	100	1000

ROD HANGER LOK-BOLT AS		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
5810S	1/4" x 1-1/2"	5/16"	50	250
5815S	3/8" x 1-7/8"	3/8"	50	250
5825S	1/2" x 2-1/4"	1/2"	25	125

TIE-WIRE LOK-BOLT AS				
CAT #	SIZE	DRILL DIA	CTN	MSTR
5700S	5/16" x 2-3/8"	5/16"	100	1000

LOK-BOLT AS EXTENDERS		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
5684S	3/8" x 1-1/4"	3/8"	50	500

RELATED PRODUCTS



DCH293R2DH
20V MAX* XR® SDS PLUS
ROTARY HAMMER
W/DUST COLLECTION



DCH273P2DHO
20V MAX* XR® SDS PLUS
ROTARY HAMMER W/ON-BOARD
DUST EXTRACTOR



DCH481X2
60 V MAX** 1-9/16"
SDS MAX COMBINATION
HAMMER



DWH050K
LARGE HAMMER DUST
EXTRACTION -
HOLE CLEANING



HOLLOW DRILL BIT
SDS-PLUS AND
SDS-MAX CARBIDE



DWV012
10-GALLON HEPA/RRP
WET/DRY DUST EXTRACTOR

For 20V MAX Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18. **Maximum initial battery voltage (measured without a workload) is 20 and 60 volts. Nominal voltage is 18 and 54.

1-800-4-DEWALT

www.DEWALT.com

Copyright ©2021 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWL0KBLTASSS