

LOCTITE®

Loctite®
Insulating
& Sealing
Wrap



Withstands extreme conditions:

- -65°F to 500°F (-53°C to 260°C)
- Tensile strength up to 700 psi
- Dielectric strength up to 400 vpm
- UV resistant
- Saltwater, fuel, and acid resistant

Typical applications:

- Industrial
- Automotive repair
- Marine
- Plumbing
- Electrical
- And more!

Item #	Color	Roll Size	Service Temperature	Tensile Strength	Dielectric
1212164	Red	1" x 10'	-65°F to 500°F (-53°C to 260°C)	Up to 700 psi	Up to 400 vpm
1496756	Black	2" x 36'			
1540599	Black	1" x 10'			

Henkel


Excellence is our Passion



Excellence is our Passion

TYPICAL APPLICATIONS

INDUSTRIAL: High Voltage Terminations, Motor Lead Insulation, Extension Cord, Connection Wrap, Insulating Generator Coils, General Electrical Insulation, Flexible Heater Repairs, Heavy Duty Industrial Pipe Wrap, Tool Handle Wrapping, Temporary Hose Repairs, Emergency Plumbing Repairs

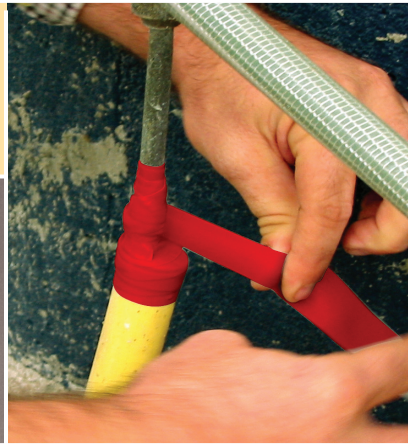

Hundreds of uses

- Industrial
- Automotive
- Marine



AUTOMOTIVE: Automotive Repair Tape, Emergency Radiator Hose Repairs, Automotive Harness Wrapping, Jumper Cable Grip/Insulation, Vibration Protection for Hoses & Pipes, Temporary Hose Clamp Applications



All of these applications and more!

MARINE: Boat Rigging Wrap, Underwater Uses, Rewraps Sailboard Wishbones, Saltwater-Proof Wrap, Wrapping of Wire Rope "Ends", Marine Exhaust Repairs, Protecting Boat Wiring, Power Hookup Protective Wrap, Diving Industry Uses, Bus Bar Insulation, Coolant Line Repairs, Whipping Rope Ends, Sailboat Chafe Protection



Henkel Corporation
One Henkel Way
Rocky Hill, CT 06067
Tel: 860-571-5100
Fax: 860-571-5465
www.henkeln.com/industrial

Except as otherwise noted, all marks used are trademarks and/or registered trademarks of Henkel and/or its affiliates in the U.S. and elsewhere. © = registered in the U.S. Patent and Trademark Office. © Henkel Corporation, 2011. All rights reserved. 7742/LT-5289 (8/11)