

# REA 150 W Incandescent Luminaires<sup>①</sup>

## Enclosed and Gasketed

UNILETS<sup>®</sup> for use with Threaded Metal Conduit. Medium Base. Inexpensive, Low Wattage Fixture for use in Wet Locations.

### NEC:

Rated for Ordinary (Unclassified) Locations

### Applications

- Vaportight enclosed and gasketed lighting fixtures, suitable for use in wet locations.
- Standard glass globes take up to 150 W A-21 lamps. Optional polycarbonate plastic globes take up to 100 W A-21 lamps.

### Features

- Inexpensive fixture designed for use without reflector.
- Spring-mounted shock-absorbing socket prolongs lamp life.
- Guards snap on easily and securely. Spring-action balls snap into detents in fixture body.

### Standard Materials


- Mounting bodies: pressure cast copperfree (4/10 of 1% max.) aluminum
- Socket: porcelain with brass screw shell
- Guards: steel or aluminum guards

### Standard Finishes

- Mounting bodies: burnished
- Steel wire guard: zinc electroplate
- Aluminum guard: aluminum polymer enamel
- Socket and globes: natural finish

### NEC Certifications and Compliances

- UL Standard: UL 1598

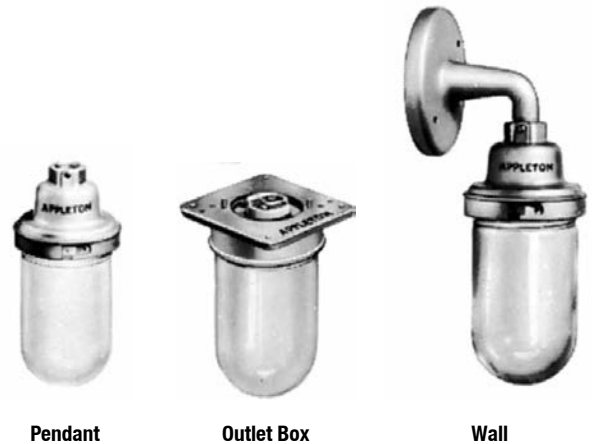


Pendant

Outlet Box

Wall

### Dimensions in Millimeters (Inches)

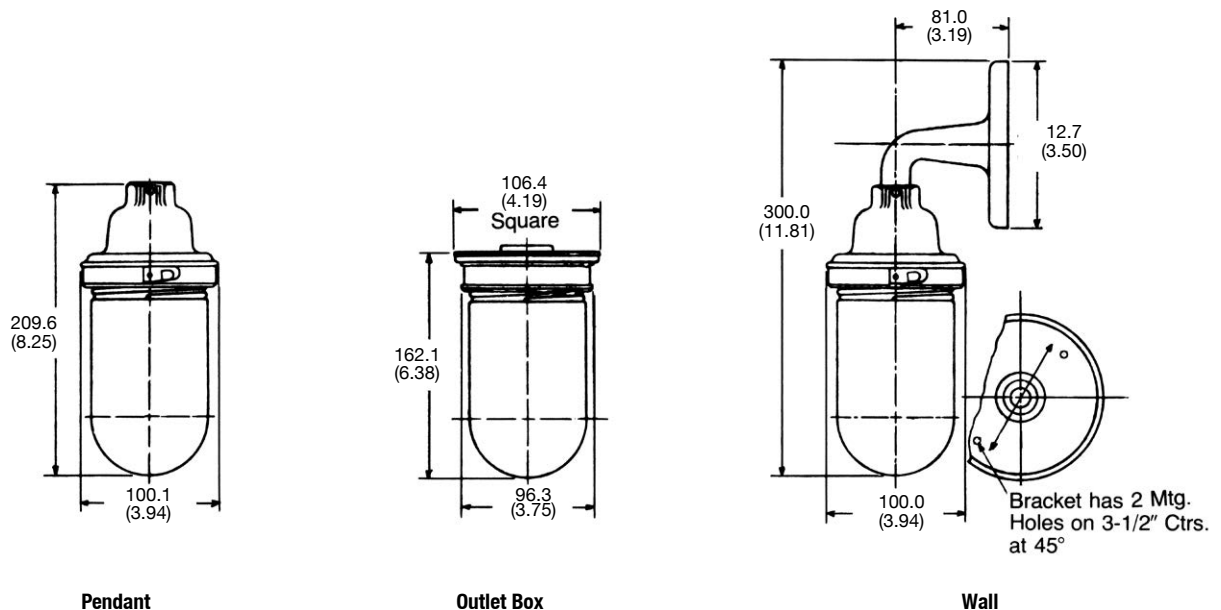








<sup>①</sup> Maximum size A-21 lamp: glass globe – 150 Watts; plastic globe – 100 Watts. No reflectors are available for REA fixtures.



# REA 150 W Incandescent Luminaires <sup>①</sup>

## Enclosed and Gasketed

UNILETS<sup>®</sup> for use with Threaded Metal Conduit. Medium Base. Inexpensive, Low Wattage Fixture for use in Wet Locations.

NEC:  
Rated for Ordinary (Unclassified) Locations

|  |   | Description   | Hub Size (Inches) | Catalog Number   |
|--|---|---|-------------------|------------------|
| <br>Pendant | <br>Outlet Box | <b>Pendant Fixture</b>  | 1/2               | REA-1050         |
|  |   |   | 3/4               | REA-1075         |
|  |   | <b>Outlet Box Fixture</b><br>For 3-1/4" or 4" octagonal, or 4" square mounting. |                   | REA-10B          |
| <br>Wall    |   | <b>Wall Fixture</b>   |                   | REA-10LB         |
|  |   | <b>Pendant Hood</b>   | 1/2<br>3/4        | REA-50<br>REA-75 |
|           |   | <b>Wall Bracket</b>   | 1/2 male stem     | REA-1BR          |
|           |   | <b>Lamp Socket</b>  |                   | VPLR-123         |
| <br>VWG-1 | <br>VGU-1    | <b>Steel Guard</b><br>For Outlet Box fixture only.                              |                   | VWG-1            |
|  |   | <b>Aluminum Guard</b><br>For Pendant and Wall Mount fixtures only.              |                   | VGU-1            |

|  |  | Description          | Catalog Number <sup>①</sup> |         |
|--|--|----------------------|-----------------------------|---------|
|  |  |                      | Glass                       | Plastic |
| <b>Colored Glass and Polycarbonate Globes</b>  |  |                      |                             |         |
| <br>Glass | <br>Plastic | Clear                | VGL-1CL                     | VPG-1CL |
|  |  | Amber                | VGL-1AM                     | VPG-1AM |
|  |  | Blue                 | VGL-1BL                     | VPG-1BL |
|  |  | Green                | VGL-1GR                     | VPG-1GR |
|  |  | Opal                 | VGL-1OP                     | —       |
|  |  | Red                  | VGL-1RE                     | VPG-1RE |
|  |  | Clear Heat-Resistant | VGL-1HR                     | —       |

<sup>①</sup> Maximum size A-21 lamp: glass globe – 150 Watts; plastic globe – 100 Watts. No reflectors are available for REA fixtures.