

KK511J




VSM ALUMINIUM OXIDE




Grain type	Aluminium oxide
Bonding	Full-resin bonded
Colour	Red-brown
Backing	J-Cotton
Flexibility	Flexible
Production width	1,480 mm (P 60, 80) 1,450 mm (P100 - 180) 1,050 mm (P220 - 500)

Materials



Features



Universal, high-performance aluminium oxide abrasive on a flexible cotton cloth backing for applications requiring low to medium contact pressure. Characterised by its long lifetime and good adaptability. Especially suitable for working on contours, fittings or edge finishing.


Grit sizes:¹⁾



Benefits

- > Long service life
- > Universally applicable
- > High performance abrasive
- > Good adaptation to the workpiece

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG
Siegmundstraße 17 · 30165 Hannover · Germany
T +49 511 3526 0 · F +49 511 3521 315
sales@vsmabrasives.com · www.vsmabrasives.com

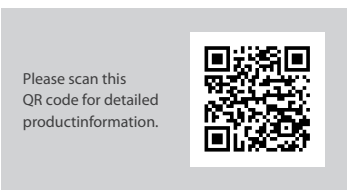

¹⁾ P = Categorized according to the FEPA standard. Subject to technical changes.